


02K / 04K

2/4-JAW HIGH SPEED HOLLOW POWER CHUCK

二/四爪高速中空动力卡盘



尺寸图 Dimensions

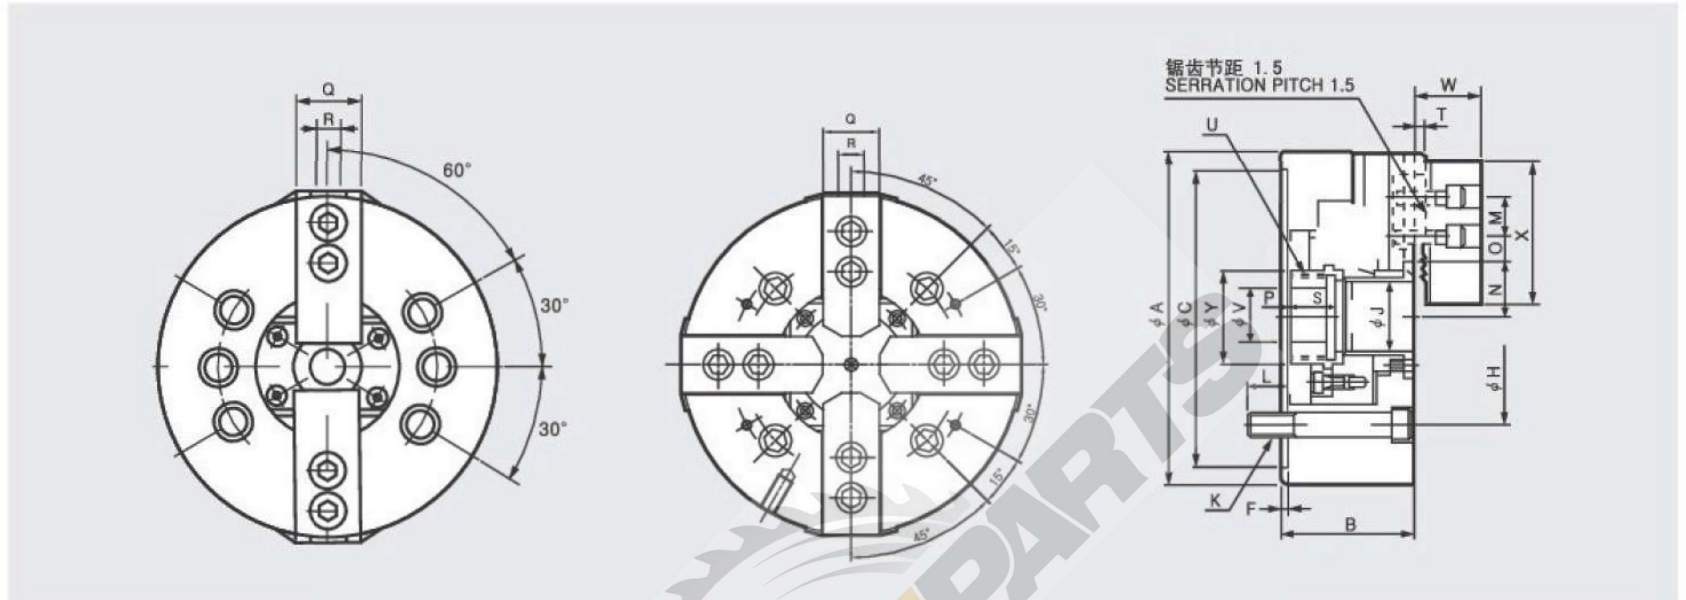

规格表 Specification

单位/UNT:mm

型号 Model	主轴鼻端 番号	A	B	C (h6)	F	H	J	K	L
02K05	A2-4	135	60	110	4	82.6	33	4-M10x75	15
02/04K06	A2-5	169	81	140	5	104.8	45	6/4-M10x95	16
02/04K08	A2-6	210	91	170	5	133.4	52	6/4-M12x105	18
02/04K10	A2-8	254	100	220	5	171.4	75	6/4-M6x100	22
02/04K12	A2-8	304	110	220	6	171.4	91	6/4-M16x110	23

型号 Model	M	N (max)	N (min)	O (max)	O (min)	P (max)	P (min)	Q	R	S	T	U (max)	W	X
02K05	14	26.2	23.5	19	6	1	-9	25	10	20	2	M40x1.5P	31.5	62
02/04K06	20	32	29.25	22.75	9.25	11	-1	31	12	19	2	M55 x 2.0	37.5	73
02/04K08	25	38.7	35	30	15	14.5	-1.5	35	14	20.5	2	M60 x 2.0	39	95
02/04K10	30	51	46.6	34	14.5	8.5	-10.5	40	16	25	2	M85 x 2.0	43	110
02/04K12	30	61.3	56	45.75	15.75	8	-15	49	21	28	2	M100 x 2.0	50.5	129

型号 Model	夹持直径 Grip Dia (mm)		爪行程 Jaw stroke (mm)	柱塞行程 Plunger Stroke (mm)	最大拉力 Max.pull Force		最大静夹持力 Max.Gripping Force		最大转速 Max.speed r.p.m(min ⁻¹)	净重 Weight (kg)	搭配 油缸型号 Matching Cylinder	最大液压压力 Max.hydraulic pressure	
	max	min			kgf	(KN)	kgf	(KN)				kg/cm ²	(Mpa)
02K05	135	10	5.4	10	1120	11	2340	23	7000	6.5	TK-536	19	1.9
02/04K06	169	15	5.5	12	1420/1630	14/16	3770/4180	37/41	6000/4500	13.1	TK-646	18.5/21	1.8/2.1
02/04K08	210	14	7.4	16	2240/2240	22/24	5710/6010	56/59	5000/3600	21.3	TK-852	17/19	1.7/1.9
02/04K10	254	31	8.8	19	2850/3160	28/31	7440/8050	73/79	4200/3200	33.5	TK-1075	18/20	1.8/2.0
02/04K12	304	34	10.6	23	3670/4080	36/40	9690/10400	95/102	3300/2500	52	TK-1291	18/20	1.8/2.0