


03K

3-JAW HIGH SPEED HOLLOW POWER CHUCK

三爪高速中空动力卡盘

尺寸图 Dimensions

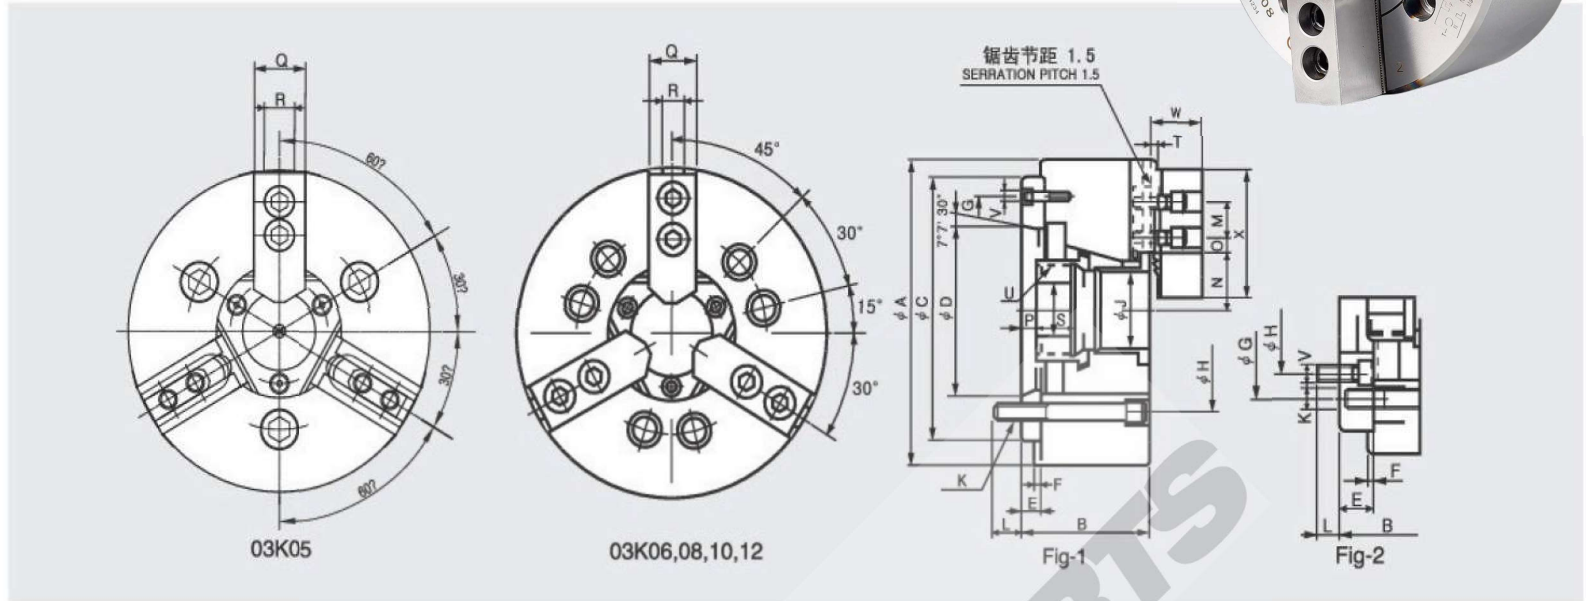

规格表 Specification

单位/UNT:mm

型号 Model	主轴鼻端 番号	A	B	C (h6)	D	E	F	G	H	J	K	L	M
03K05	A2-4	135	72	110	63.513	15	4	96	82.55	33	3-M10	13	14
03K06	A2-5	169	91	140	82.563	15	5	116	104.8	45	6-M10	16	20
03K08	A2-6	210	103	170	106.375	17	5	150	133.4	52	6-M12	18	25
03K10A06	A2-6	254	120	220	106.375	25	5	171.4	133.4	75	6-M16	18.5	30
03K10A08	A2-8	254	113	220	139.719	18	5	190	171.4	75	6-M16	24	30
03K12A06	A2-6	304	129	220	106.375	25	6	171.4	133.4	91	6-M16	18.5	30
03K12A08	A2-8	304	122	220	139.719	18	6	190	171.4	91	6-M16	25	30

型号 Model	N (max)	N (min)	O (max)	O (min)	P (max)	P (min)	Q	R	S	T	U (max)	V	W	X
03K05	26.5	23.8	19.75	7.75	17	7	25	10	20	2	M40×1.5P	3×M6	31.5	62
03K06	32	29.25	22.75	9.25	26	14	31	12	19	2	M55×2	3×M6	37.5	73
03K08	38.7	35	29.75	14.75	31.5	15.5	35	14	20.5	2	M60×2	6×M6	39	95
03K10A06	51	46.6	33.75	14.25	33.5	14.5	40	16	25	2	M85×2	6×M12	43	110
03K10A08	51	46.6	33.75	14.25	26.5	7.5	40	16	25	2	M85×2	6×M8	43	110
03K12A06	61.3	56	45.75	15.75	33	10	49	21	28	2	M100×2	6×M12	50.5	129
03K12A08	61.3	56	45.75	15.75	26	3	49	21	28	2	M100×2	6×M8	50.5	129

型号 Model	夹持直径 Grip Dia (mm)		爪行程 Jaw stroke (mm)	柱塞行程 Plunger Stroke (mm)	最大拉力 Max.pull Force		最大静夹持力 Max. gripping force	最大转速 Max.speed r.p.m(min ⁻¹)	净重 Weight (kg)	搭配 油压缸型号 Matching Cylinder	最大设定油压压力 Max.hydraulic pressure		工作 硬爪 Operating HARD JAW
	(max)	(min)			kgf	(KN)					kg/cm ²	(Mpa)	
03K05	135	12	5.4	10	17.5	1784	36(3671)	7000	6.7	TK536	2.8	29	HJ-05
03K06	169	15	5.5	12	22	2243	57(5812)	6000	13.7	TK646	2.8	28.6	HJ-06
03K08	210	13	7.4	16	34.8	3549	86(8769)	5000	23.6	TK852	2.65	27	HJ-08
03K10A06	254	31	8.8	19	43	4385	111(11319)	4200	41.5	TK1075	2.7	27.5	HJ10
03K10A08	254	34	8.8	19	43	4385	111(11319)	4200	40.0	TK1075	2.7	27.5	HJ10
03K12A06	304	42	10.6	23	55	5608	144(14684)	3300	67.0	TK1291	2.7	27.5	HJ12
03K12A08	304	50	10.6	23	55	5608	144(14684)	3300	64.0	TK1291	2.7	27.5	HJ12